


SenoFix® FT


TECHNICAL DATA SHEET



ALUMINIUM SUBSTRUCTURE

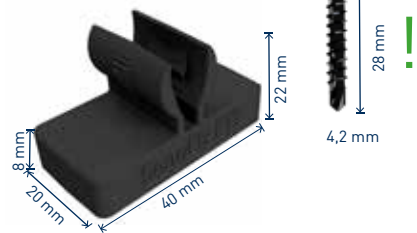

WOOD SUBSTRUCTURE

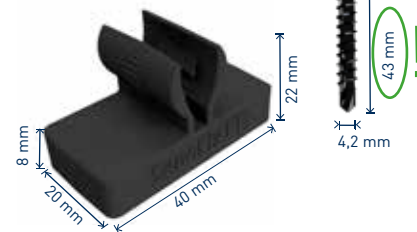

Facade Application




Terrace Application



Plank Thickness 20 - 30 mm

Optional accessories: SIHGAFIX®
TX 20, 77mm & TTB

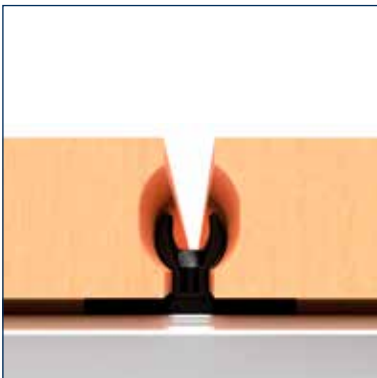

DETAILS

- or untreated, profiled wooden planks released by SIHGA® screwed fastening for floorboards only in the joint with the SenoFix® FT, cover- and lateral surfaces of the boards remain unharmed
 - connector height per the latest state of the art
- quantity calculation per m²:
1 : substructure spacing [m] : (board width [m] + joint [m])



TAKE THE BEST

