

SIHGA®

Monitorix® LAN-module

INNOVATIVE CONSTRUCTION TECHNOLOGY
AND SUPPORT FOR THE FUTURE

MA Nr. TT60309/25/09/EN

TAKE THE BEST



Assembly video




SIHGA® GmbH | Gewerbpark Kleinreith 4 | 4694 Ohlsdorf bei Gmunden | AUSTRIA
Tel.: +43 7612 / 74 370 - 0 | E-Mail: info@sihga.com | www.sihga.com

1

Packaging unit:
Top-hat rail mounting possible
On top-hat rail:

1 pc

2 DU*

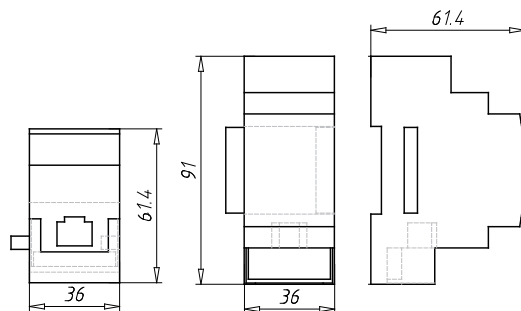

*DU = Dividing unit (18 mm)

2


Network requirements:

- LAN connection via RJ45 cable 10/100 Mbps to a router (no POE).
- DHCP server must provide IP address.
- DHCP must also provide valid DNS.
- Network connection must not require a proxy.
- Required outgoing ports in Internet:
80 TCP, 443 TCP, 53 UDP/TCP,
123 UDP/TCP, ICMP
- Incoming connections are not carried out -
No NAT forwarding necessary

3


Tool-free assembly:

- 01 Plug connection (female) for connector
- 02 Plug connection (male) to processor unit
- 03 Plug connection for network (LAN cable)

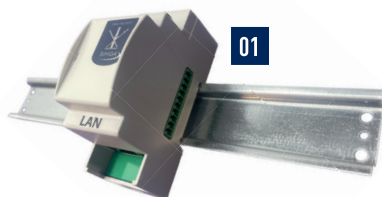

4

Connection:

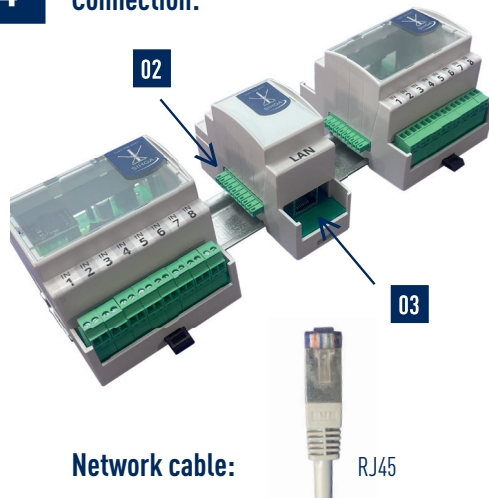

Network cable:

RJ45


5

Connection to **electronics**:

power
supply

processor unit

LAN-module

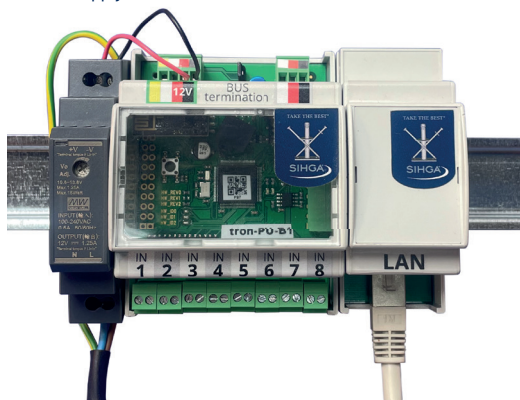

6

LAN-status-LED:

LED lights up or flashes when connected to router/
network

