

GoFix[®] ZS


TECHNISCHES DATENBLATT



SIHGA [®] montagepack		Dimension GoFix [®] ZS	Dachaufbau** Dicke [mm]
Art. Nr.	VE	d1 x L	von
26996*	75	8,0 x 165	75
27006*	75	8,0 x 195	100
27116	75	8,0 x 225	130
27126	75	8,0 x 235	140
27136	75	8,0 x 255	155
27146	75	8,0 x 275	175
27156	75	8,0 x 302	200
27166	75	8,0 x 335	230
27176	75	8,0 x 365	255
27186	75	8,0 x 397	285
27196	75	8,0 x 435	320



*Ausführung mit Tellerkopf, DK = 16 mm

**bei Gewindeeindringtiefe in Sparren von 80 mm

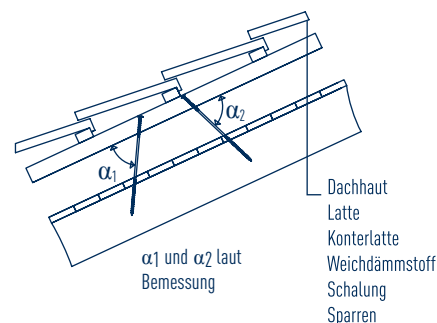

Abmessung [mm]

GoFix [®] ZS			
d1	d2	TX	DK
8,0	8,0	40,0	10,0

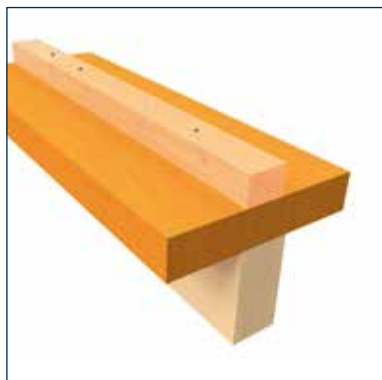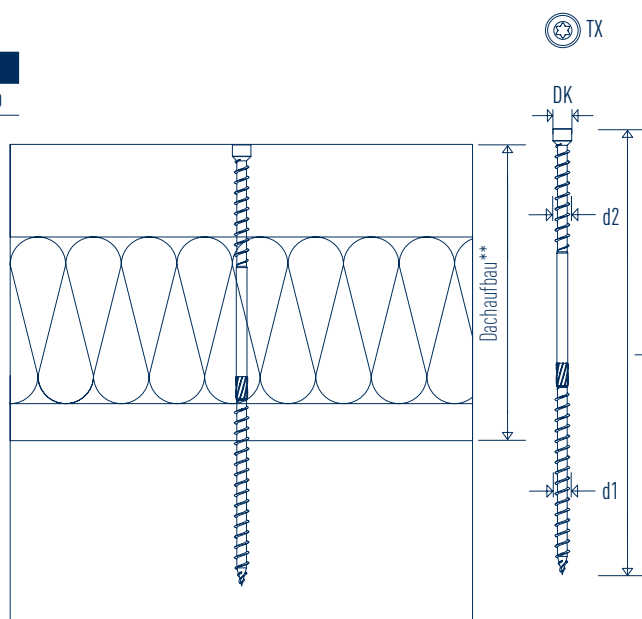

DETAILS

- befestigt weiche Dämmstoffe bei Aufsparrendämmungen
- auch für Dämmstoffe mit einer Druckspannung unter 50 kPa; kein Druck auf den Dämmstoff
- Onlinebemessung: auf www.sihga.com (Aufsparrendämmung)

ETA-11/0425



TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland