


JustiFix® II JK S

TECHNICAL DATA SHEET




JustiFix® II JK 50 S



JustiFix® II JK 90 S



JustiFix® II JK 125 S

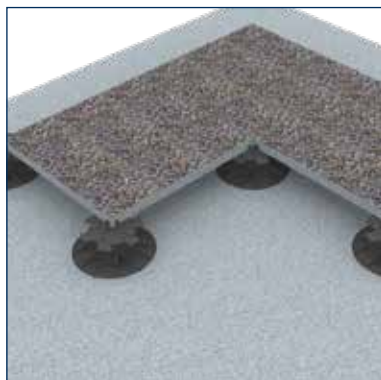

SIHGA®		Dimension JustiFix® II JK	Adjustment Range		Support Surface Diameter
montagepack	PU		from	to	
Art. No.		Type	[mm]		[mm]
33346	5	50 S	30	50	210
33426	5	90 S	50	90	210
33126	5	125 S	50	125	210
33156	4	160 S	120	160	210

DETAILS

- monitored production from polypropylene, with a special recipe
- height-adjustable distance between substructure and any foundation
- upper section for slabs with joint distance 4 mm and spacer ribs with integrated predetermined breaking point
- load capacity per piece max. 6.0 kN (on solid and unpaved subsoil; 4 per m², sufficient for 50 cm Plate size, for example)



TAKE THE BEST



**KLIMANEUTRALES
UNTERNEHMEN**
certified by Fokus Zukunft



Leitbetrieb Österreich Leitbetrieb Deutschland