



Monitorix® ROOF PORT

all product images © Fleck GmbH

FLAT ROOF INSPECTION PORTS AND ACCESSORIES



Monitorix® ROOF PORT-FLAT

Flat roof inspection port

- 4in1 flat roof inspection port DN100/125
- with condensate separator, can also be used as renovation vent

Our partner:



Monitorix® ROOF PORT-GREEN

Green roof inspection port

- 4in1 green roof inspection port DN125
- With insulation 600 mm high
- Suitable for the installation of ventilation on extensive and intensive green flat and inverted roofs
- Double-walled construction with integrated thermal insulation protects against condensation in the pipe

Variants Flange collar

- Bituminous Collar/Sleeve
- Sealing Collar/Sleeve
- PVC/PP Collar/Sleeve



Monitorix® ROOF PORT-TERRACE

Terrace inspection shaft

- for terrace decks with particularly small overall height
- Watertight and with screw-off cap for checking the vapour retarder level for possibly penetrated water


Please turn the page
Calculation sheet on
the following page



Monitorix® ROOF PORT-ROTOR

Flat roof forced-air vent

- With wind-driven rotor cover
- Rotor rotates from a wind speed of approx. 1 m/sec
- Rotor for retrofitting, top seal

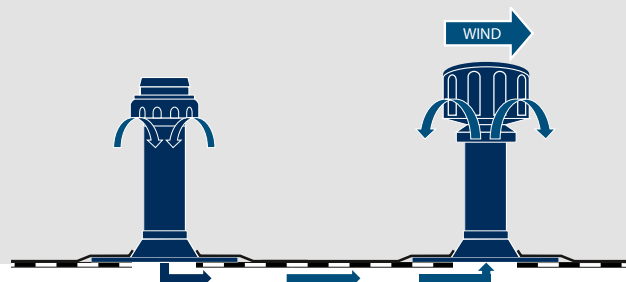

Calculation basis

for Monitorix® ROOF PORT inspection ports


fields marked with * are mandatory; please also attach any existing plans as PDF or DWG files

General information


Client/Company*			
Contact person*		Deb. No. SIHGA®	
Adress*		Postcode/location*	
Telephone*		VAT-No.*	
E-Mail*			
Construction project*	☐ new construction ☐ renovation		

Project details

Desired inspection port	Desired flange collar/sleeve	Quantity (if already known)
☐ Monitorix® ROOF PORT-FLAT (a) Flat roof port	☐ Bituminous Collar/Sleeve (TT61000) ☐ Sealing Collar/Sleeve (TT61100) ☐ PVC/PP Collar/Sleeve (TT61200)	_____ pcs _____ pcs _____ pcs
☐ Monitorix® ROOF PORT-GREEN (b) Green roof port Standard length: 600 mm (other lengths available on request)	☐ Bituminous Collar/Sleeve (TT61300) ☐ Sealing Collar/Sleeve (TT61400) ☐ PVC/PP Collar/Sleeve (TT61500)	_____ pcs _____ pcs _____ pcs
☐ Monitorix® ROOF PORT-TERRACE (c) Terrace inspection shaft (Minimum installation height 400 mm)	☐ Bituminous Collar/Sleeve (TT61600) ☐ Sealing Collar/Sleeve (TT61700)	_____ pcs _____ pcs

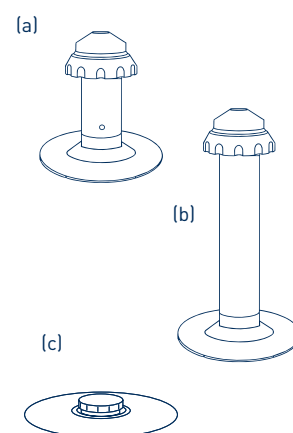

Inspection port accessories	Quantity (if already known)
☐ Monitorix® ROOF PORT-ROTOR (d) (TT61800) Flat roof forced-air vent with rotor	_____ pcs
☐ Monitorix® ROOF PORT-TIGHT (e) (TT61910) Cap for inspection port	_____ pcs

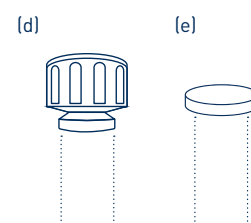

Our partner:



TAKE THE BEST

