

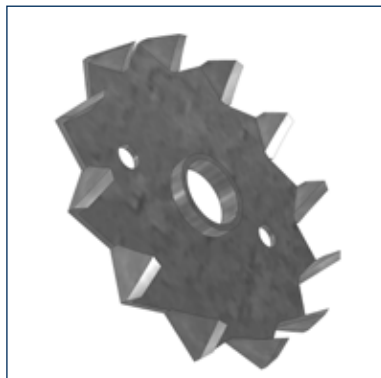



Shear Dowel

TECHNICAL DATA SHEET




SIHGA® montagepack		Dimension		
Art. No.	PU	Ø Outer [mm]	Ø Hole [mm]	Ø Anchor [mm]
35116	20	62	12,8	12 / 12,5
35126	20	75	16,8	16,0



Dimension	Distance stressed edge dowel axis 90° to fibre [mm]	Distance unstressed edge dowel axis 90° to fibre [mm]	Charcteristic Values [kN]* R _{yk}
62 x 12	50	38	8,7
75 x 16	60	45	11,6

* charakteristische Werte für Bemessung nach EC 5 und Festigkeitsklasse C 24 (pk 350 kg/m²)

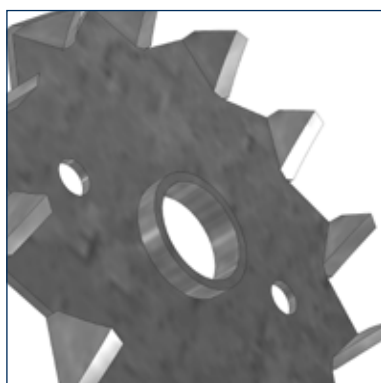

DETAILS

- Serves for the perfect introduction of shear forces with BeziFix® Anchor ZSS 12,5 and Betsi® M 12 / M 16 as well as BeziFee® with M 12 / M 16.

TAKE THE BEST



Leitbetrieb Österreich
Leitbetrieb Deutschland