

GoFix® SH


TECHNICAL DATA SHEET



Dimension [mm]


GoFix® SH

d1	d2	DK	S	TX
8	6,4	15	6,7	40

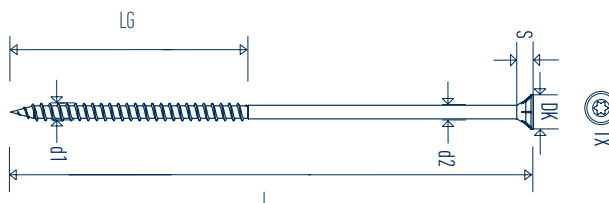

SIHGA® montagepack		Dimension GoFix® SH	Thread Length LG	Construction Beech Characteristic Values*		
Art. No.	PU	d1 x L	[mm]	Head	Thread	Wood-Wood
29426	75	8,0 x 100	80	9,8	25,9	5,7
29436	75	8,0 x 120	80	9,8	25,9	7,04
29446	75	8,0 x 140	80	9,8	25,9	7,78
29456	75	8,0 x 160	80	9,8	25,9	7,78
29466	75	8,0 x 180	80	9,8	25,9	7,78
29476	75	8,0 x 200	80	9,8	25,9	7,78
29486	75	8,0 x 220	80	9,8	25,9	7,78
29496	75	8,0 x 240	80	9,8	25,9	7,78

In addition to the cases of failure according to Johansen, other cases of failure are possible and are to be taken into consideration.
*characteristic values for design in accordance with EC 5 in construction beech (pk 740 kg/m³).

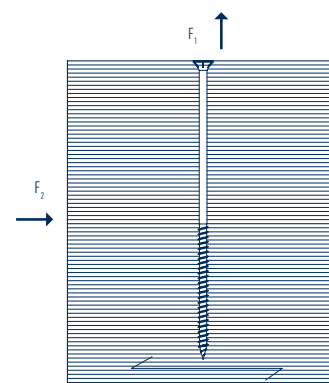

DETAILS

- no pre-drilling, quick installation also in solid wood and construction beech
- shortened thread length - high extraction values using shorter screw

Tipp: Use electric screwdriver device for assembly without pre-drilling.
 Use a washer for higher head pull-through values.

ETA-20/0558

