
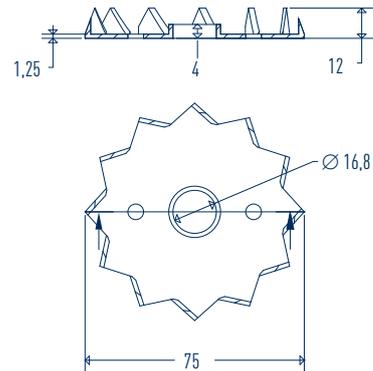


# Shear Dowel

SIHGA® montagepack		Dimension		
Art. No.	PU	Outer Ø [mm]	Ø Hole [mm]	Ø Anchor [mm]
35116	20	62	12,8	12 / 12,5
35126	20	75	16,8	16,0

Dimension	Distance stressed edge dowel axis 90° to fibre [mm]	Distance unstressed edge dowel axis 90° to fibre [mm]	Charcteristic Values [kN]* R <sub>y,k</sub>
62 x 12	50	38	8,7
75 x 16	60	45	11,6

\* characteristic values for dimensioning according to EC 5 and strength class C 24 (p<sub>k</sub> 350 kg/m<sup>2</sup>)

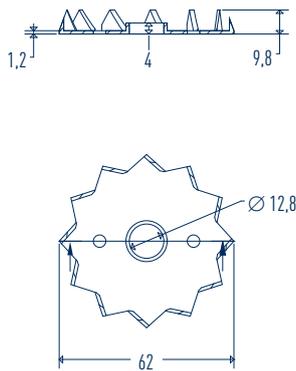

Shear Dowel 62/12



Shear Dowel 75/16



## SIHGA® TIP:

Serves for the perfect introduction of shear forces with BeziFix® Anchor ZSS 12.5 and Betsi® M 12 / M 16 as well as BeziFee® with M 12 / M 16.