

GoFix® 45

TECHNICAL DATA SHEET





GoFix® 45
8,0 mm



GoFix® 45
10,0 mm

SIHGA®		Dimension		Installation Part	
montagepack		Ø Drill	GoFix® 45	Steel Thickness	Ø Steel Part Hole
Art. No.	PU	[mm]	[mm]	[mm]	[mm]
31582	10	8,0	29 x 19 x 19,5	≤ 5	17
31592	10	10,0	43 x 26 x 25	6 - 10	26

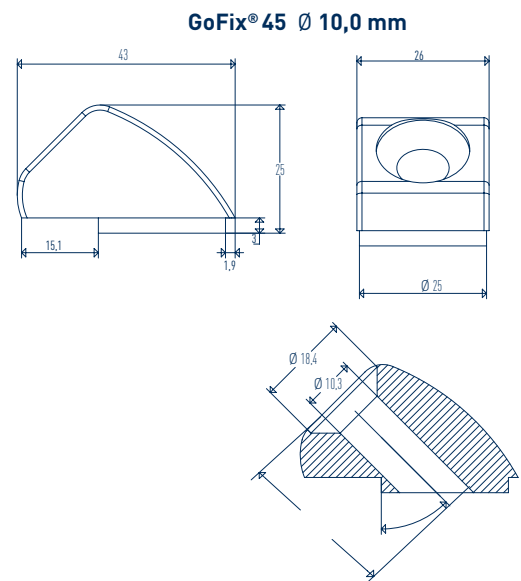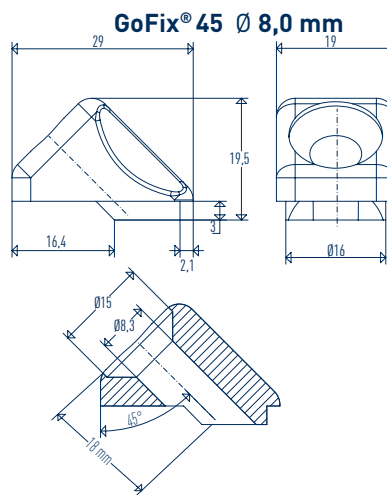

DETAILS

- fixed 45° inclination for optimal tensile force uptake
- ideal in combination with the SIHGA® GoFix® S+ 8.0 and 10.0 mm fully threaded screw or GoFix® SH
- no special production needed with inclined counterbore
- the most varied metal tabs can be used

Tip: For effortless screw-in of GoFix® S+, a tangential-impact screwdriver to spare your wrist joint.



TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland