
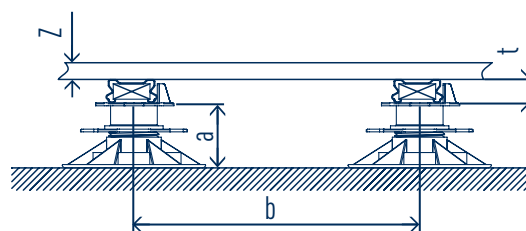


Guide

Terrace quantity determination for application specialists

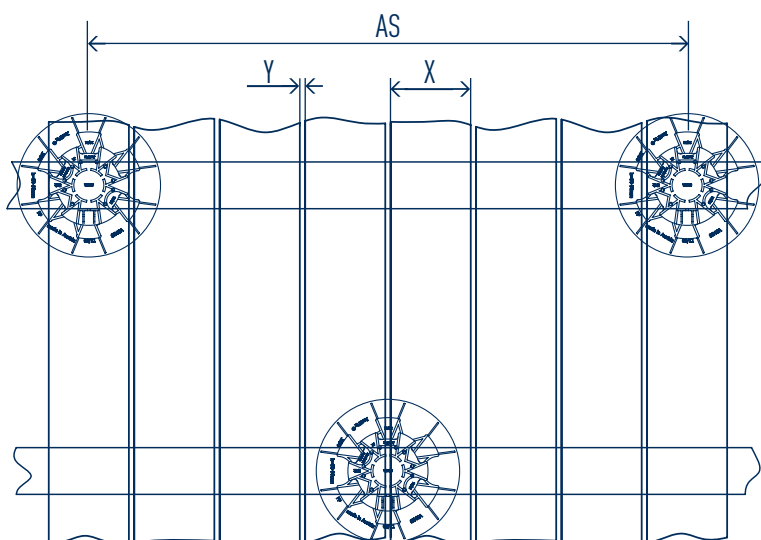

Executing firm*			
Contact person*			
Postcode*		Location*	
Telephone*		Fax	
Email*			
Construction project*			

Our online dimensioning software is available at www.sihga.com at all times!

Roof cladding material*	
X =	plank width*
Y =	join width (SenoFix 6mm, rest min. 7mm)*
Z =	plank thickness*
Substructure*	☐ Wood ☐ Alu ☐ SymbioFix
t =	substructure thickness*
a =	(installation height) min. 30 mm*
b =	(substructure spacing 400 - 500)*

Attachment*	
Visibly attached	TerrassenFix ☐ KompeFix ☐
Non-visibly attached	SenoFix ☐
	DielenFix ☐
	GleitFix ☐
Base*	Solid ☐ Soft ☐
Total surface*	m ²
AS = bearing spacing	(1.10 free for SF, 0.7 for wood/alu)

*Please complete in full.
No dimensioning can be performed otherwise!

TAKE THE BEST



Leitbetrieb Leitbetrieb
Österreich Deutschland

Dimensioning template

Quantity determination for terrace

Quantity determination (without reserve)

Substructure:	$\frac{\text{Surface (m}^2\text{)}}{b \text{ (m)}} =$	Substructure (running metres)
Adjustable feet:	$\frac{\text{Substructure(running metres)}}{AS \text{ (m)}} =$	Adjustable feet (units)
Plank fastening:	$\frac{\text{Surface (m}^2\text{)}}{b \text{ (m)}} =$	Substructure (running metres)
	$\frac{\text{Substructure(running metres)}}{(X+Y) \text{ (m)}} =$	Attachment (unit) [Calculate DielenFix and visible screw connection twice]

Accessories:	Depth gauge	☐		
	Counter sink	☐		
	Non-woven material	☐		
	Drilling template	☐		
	Clamp	☐		
	FugiFix	☐		
	TerrassenFix Aqua	☐	4 m	☐

Note:
Theoretical number of products + 15% surcharge = number of products for the offer.

*Please complete in full.
No dimensioning can be performed otherwise!

TAKE THE BEST



Leitbetrieb Leitbetrieb
Österreich Deutschland