

Monitorix® CORE-sensor

INNOVATIVE CONSTRUCTION TECHNOLOGY AND SUPPORT FOR THE FUTURE

MA Nr. 60312/24/10/EN





Assembly video



SIHGA® GmbH | Gewerbepark Kleinreith 4 | 4694 Ohlsdorf bei Gmunden | AUSTRIA Tel.: +43 7612 / 74 370 - 0 | E-Mail: info@sihga.com | www.sihga.com

Packaging unit: 1 pcs.

Dimensions:

Length: 57 mm Width: 57 mm Height: 15 mm

The CORE-sensor is used for the selective detection of wood moisture, humidity and temperature.

Measuring ranges:

Humidity: N - 100 % -40° to 100° Temperature:

Wood moisture: 6% - 30%

0 - 40 mm (Standard Measuring depth: on request - 120 mm

The Monitorix CORF-sensor includes:

01 1x connection (LIN-BUS) to the electronics

O2 2x gold-plated contacts for spring / mounting holes

03 1x Serial number

04 2x Sensor screw 5.0 x 45 mm

05 2x Washer for mounting the spring

2x Spring to compensate for shrinkage and swelling of the


Connecting the sensor cable CORE/-DIGITAL to the

electronics (processor unit or connector)

Connections and components


CORE-sensor connection possible in a star-shaped arrangement




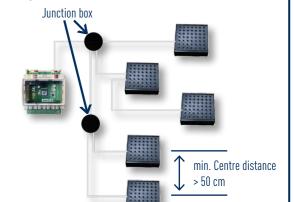

Connecting the sensor cable CORE/-DIGITAL to the CORF-sensor





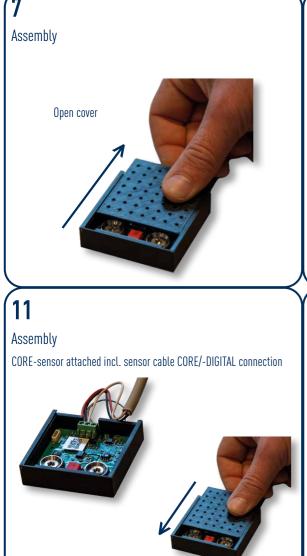

Close cover








Fastening 90° to the surface Compress springs to max. 4 mm









Template for download at https://www.sihga.com/en/service/download/monitorix/ 13



14

! Note!

Proper documentation is required to ensure the correct assignment of sensors in the cockpit

