

TefaFix[®] F

SIHGA[®]



TefaFix[®] F
aluminium bright



TefaFix[®] F
aluminium SC 9 coated




SIHGA® Feature

YOUR Benefit

1-piece system	can be combined with the counterpart for terrace application
also available in SC 9 coated	continuous black joint optic
profile open at the back	prefabrication of the parts possible by screwing on the rear
lateral flange	easy mounting on the existing facade substructure
special inner geometry	many connections possible with TefaBind® connector
trapezoidal shape	perfect water drainage guaranteed
TefaBind® connector	endlessly extendable in length
aluminium	durable, machinable with conventional tools and machines
universally combinable	for use also optimally with SenoFix® FT*
combinable	in case of storage with the counterpart can be used also for the terrace

* Available from specialist timber dealers

SIHGA®		TefaFix® F		
Package	Type	Surface	Length	
Art. No.	PU		[mm]	
52102	10	4400	bright	4400
52012	10	4400	SC 9	4400

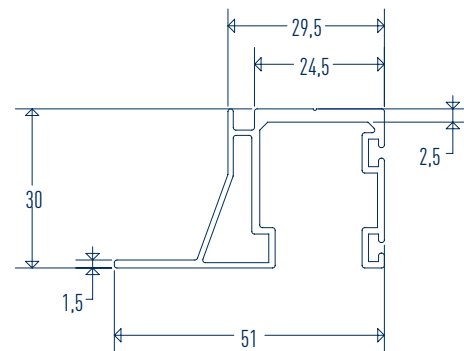

SIHGA® TIP:

To attach the TefaFix® F, we recommend BohrFix® FB 4.2 x 28/43 mm in stainless steel. Due to the linear expansion of the TefaFix® F, we recommend pre-drilling the hole for the fixing screw at least 2 mm larger.

