




SenoFix® II SX

TECHNICAL DATA SHEET

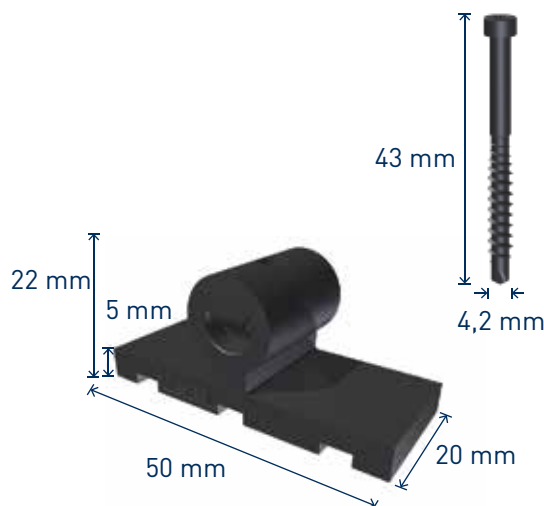

Recommended accessory:
TerrassenFix® Clamp III

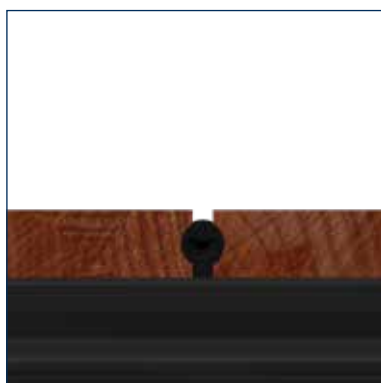

DETAILS

- or oiled, profiled wooden planks released by SIHGA®
- only in the joint through the SenoFix® II SX screwed plank fastening without damaging the top and side surfaces of the planks
- reveal joint width 6 mm

quantity calculation per m²:

1 : substructure spacing [m] : (board width [m] + joint [m])



TAKE THE BEST



**KLIMANEUTRALES
UNTERNEHMEN**
certified by Fokus Zukunft



Leitbetrieb Österreich Leitbetrieb Deutschland