


# ZaFix® STZ



## TECHNICAL DATA SHEET

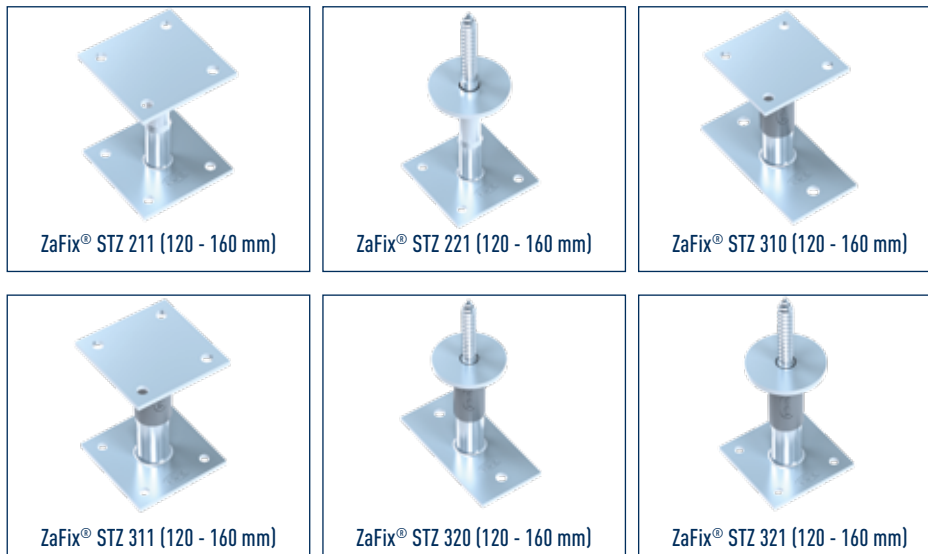

| SIHGA®      |    | ZaFix®          | Adjustment Range |     | Characteristic Values** |                    |
|-------------|----|-----------------|------------------|-----|-------------------------|--------------------|
| objektpack® |    | STZ             | Height [mm]      |     | Compressive Force [kN]  | Tensile Force [kN] |
| Art. No.    | PU | Type            | from             | to  | Rc, k                   | Rt, k              |
| 47957       | 10 | <b>STZ 211*</b> | 120              | 160 | 44,63                   | -                  |
| 47907       | 10 | <b>STZ 221*</b> | 120              | 160 | 44,63                   | -                  |
| 47917       | 10 | <b>STZ 310</b>  | 120              | 160 | 70,42                   | -                  |
| 47927       | 10 | <b>STZ 311</b>  | 120              | 160 | 70,42                   | -                  |
| 47937       | 10 | <b>STZ 320</b>  | 120              | 160 | 70,42                   | -                  |
| 47947       | 10 | <b>STZ 321</b>  | 120              | 160 | 70,42                   | -                  |

\* not height adjustable in installed condition

\*\* characteristic values for design according to EC 5 and strength class C 24 (pk 350 kg/m³)

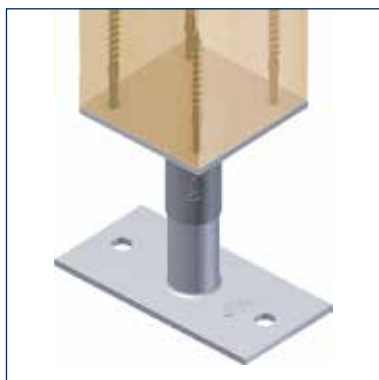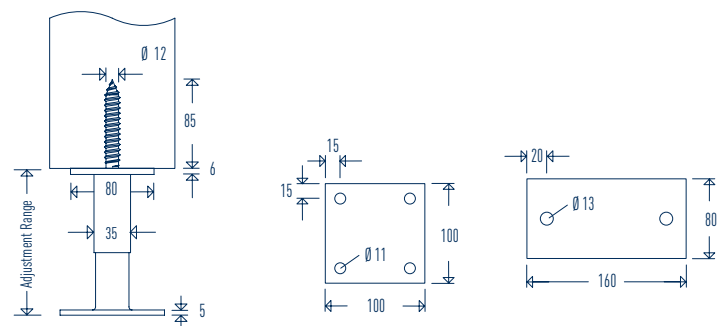

### DETAILS

- takes over up to 154.5 kN pressure force and 10.57 kN tensile force per fastening point
- durable wood connection
- thread cover through stainless steel covering sleeve
- series 300 are height adjustable in the installed condition



## TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland