



ZaFix® STZ

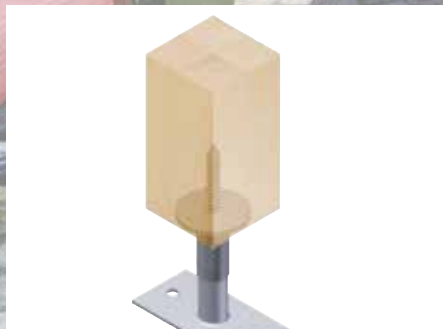

ZaFix® STZ with special SC 6 coating

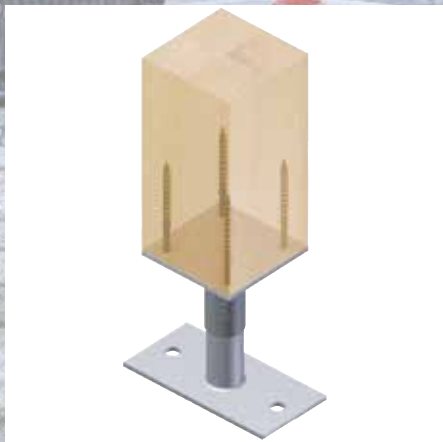

ETA-14/0160



SIHGA® Feature

takes over up to 154.5 kN pressure force and 10.57 kN tensile force per fastening point

durable wood connection

thread cover through stainless steel covering sleeve

series 300 are height adjustable in the installed condition








YOUR Benefit

the durable, reliable connection with extremely quick assembly time

structural wood protection keeps surfaces free of damage

high corrosion and spray water protection

height adjustable any time afterwards



SIHGA® objektpack®		ZaFix® STZ	Adjustment Range Height [mm]		Characteristic Values** Compressive Force [kN]
Art. No.	PU	Type	from	to	Rc, k
47957	10	STZ 211*	120	160	44,63
47907	10	STZ 221*	120	160	44,63
47917	10	STZ 310	120	160	70,42
47927	10	STZ 311	120	160	70,42
47937	10	STZ 320	120	160	70,42
47947	10	STZ 321	120	160	70,42

* not height adjustable in installed condition

** characteristic values for design according to EC 5 and strength class C 24 (pk 350 kg/m³)

