


Dimensioning template

for CLT connections

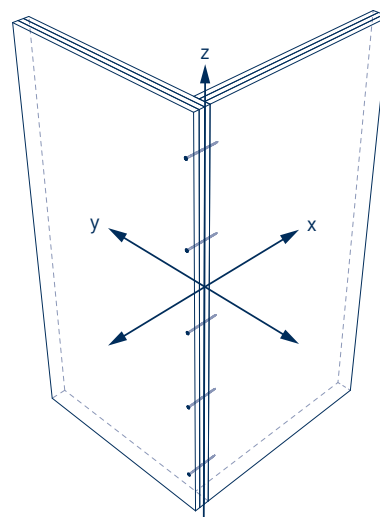

Executing company			
Contact person			
Postcode		Place	
Phone		Fax	
E-mail			
Building project			

Components:

Location:	☐ wall-wall	☐ T-joint ☐ L-joint
	☐ ceiling-wall	

wall-wall:

wall 1	Thickness [mm]:
	Top layer orientation ☐ y-direction ☐ z-direction
wall 2	Thickness [mm]:
	Top layer orientation ☐ y-direction ☐ z-direction

ceiling-wall:

ceiling	Thickness [mm]:
	Top layer orientation ☐ y-direction ☐ x-direction
wall	Thickness [mm]:
	Top layer orientation ☐ y-direction ☐ x-direction

Load (wall-wall):

Utilisation class:	☐ 1 ☐ 2
Rated load:	
Load direction:	☐ x-direction _____ [kN/m]
	☐ z-direction _____ [kN/m]
	☐ xz-direction _____ [kN/m]
Load duration:	☐ permanent ☐ long-term ☐ medium-term ☐ short-term ☐ very short-term

Load (ceiling-wall):

Utilisation class:	☐ 1 ☐ 2
Rated load:	
Load direction:	x-direction _____ [kN/m]
Load duration:	☐ permanent ☐ long-term ☐ medium-term ☐ short-term ☐ very short-term

Tip: Our dimensioning software is available to download free of charge at www.sihga.com!
Accurate completion of the dimensioning template enables fast and reliable dimensioning.

TAKE THE BEST

