



HobaFix® Max

TECHNICAL DATA SHEET

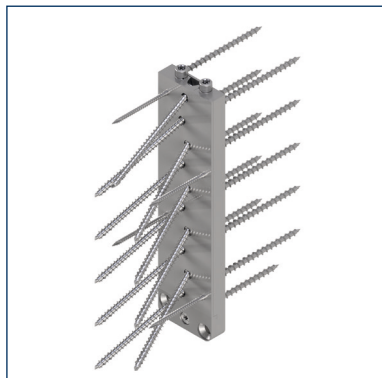

SIHGA®			Dimension			Main Beam		Secondary Beam	
montage- pack	HobaFix® Max	GoFix® HK in MB per connector	GoFix® S+ in NT per connector	2x locking screws GoFix® X+	min. width	min. height	min. width	min. height	
Art. No.	PU	Type (L)	6,0 x 100	6,5 x 100	8 x ...	[mm]	[mm]	[mm]	[mm]
31006	10	105	5	4	95	100	160	80	140
31016	10	145	7	6	125	100	200	80	180
31026	10	185	9	8	155	100	240	80	220
31036	10	225	11	10	220	100	280	100	260
31046	10	265	13	12	245	100	320	100	300
31056	10	305	15	14	295	100	360	100	340
31066	10	345	17	16	330	120	400	120	380
31076	10	385	19	18	330	120	440	120	420
31086	10	425	21	20	330	120	480	120	460

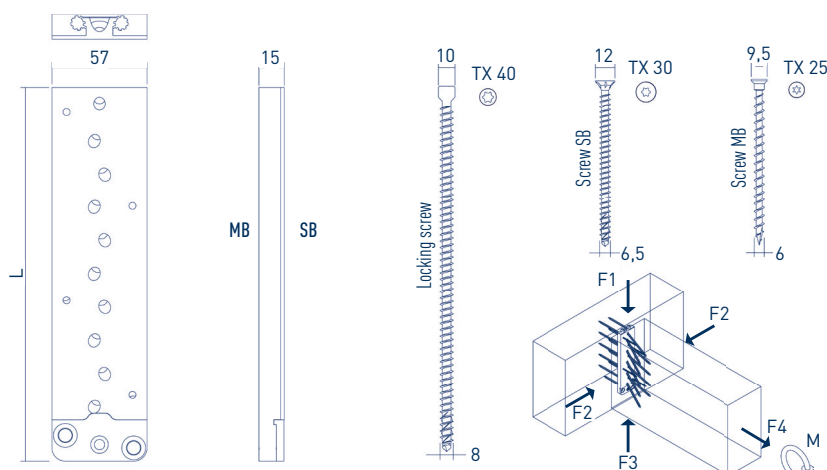

Accessories: Hobafix® Max
Milling and installation jig HFML



**Accessories: HobaFix® Max
cutter HFMF**



DETAILS

- Connectors for main beam-secondary beam structures
- High static load capacity in six load cases, up to 100 kN per connection characteristic
- Made of aluminium, monitored and anodised
- Visible and non-visible mounting



ETA-23/0821



TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland