

Alu-TeFix®

TECHNICAL DATA SHEET




Dimensions [mm] Alu-TeFix®

d1	TX	DK	KS 1	KS 2	d2	d3	hb
5,0	20	8,5	6,5	5,4	3,9	6,4	10

SIHGA® montagepack	Dimension Alu-TeFix®	Add-on Part up to AD	Substructure TefaFix® T/F
Art. No.	PU	d1 x L	[mm]
54016	200	5,0 x 51	33
54026	200	5,0 x 61	43

SIHGA® montagepack	Dimension Alu-TeFix® A2	Add-on Part up to AD	Substructure TefaFix® T/F	Substructure Aluminium 2-3 mm
Art. No.	PU	d1 x L	[mm]	
54066	200	5,0 x 51	33	yes
54076	200	5,0 x 61	43	yes

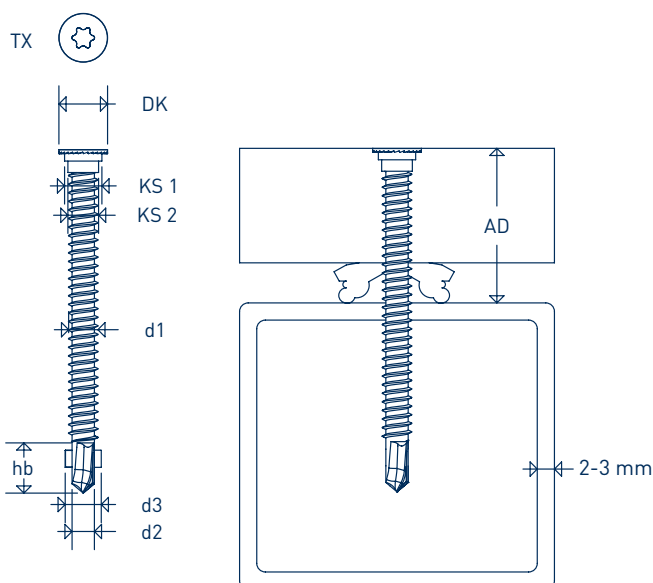

DETAILS

- Alu-TeFix® made of hardened steel or in A2
- pre-drills the boards at 6 mm and prevents lifting of the board while screwing; drilling wings break off when penetrating into the aluminium
- no displacement or chipping of the wood due to an extra thin head and saw tooth corrugation



TAKE THE BEST



Leitbetrieb Leitbetrieb
Österreich Deutschland