

Alu-TeFix®

TECHNISCHES DATENBLATT




Abmessungen [mm] Alu-TeFix®

d1	TX	DK	KS 1	KS 2	d2	d3	hb
5,0	20	8,5	6,5	5,4	3,9	6,4	10

SIHGA® montagepack	Dimension Alu-TeFix®	Anbauteil bis AD	Unterkonstruktion TefaFix® T/F
Art. Nr.	VE	d1 x L	[mm]
54016	200	5,0 x 51	33 ja
54026	200	5,0 x 61	43 ja

SIHGA® montagepack		Dimension Alu-TeFix® A2	Anbauteil bis AD	Unterkonstruktion TefaFix® T/F	Unterkonstruktion Aluminium 2-3 mm
Art. Nr.	VE	d1 x L	[mm]		
54066	200	5,0 x 51	33	ja	ja
54076	200	5,0 x 61	43	ja	ja

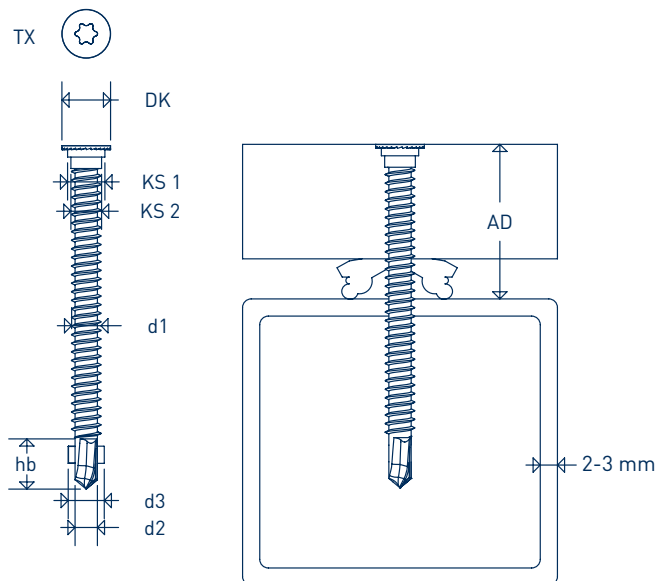

DETAILS

- Alu-TeFix® aus gehärtetem, rostfreiem Edelstahl oder in A2
- bohrt die Diele mit 6 mm vor und verhindert das Anheben der Diele während des Schraubvorganges; Bohrflügel brechen beim Eindringen in das Alu ab
- durch extradünnen Kopf und Sägezahnrippen kein Verdrängen oder Absplittern des Holzes



TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland