

SenoFix[®] FT

SIHGA[®]



SenoFix[®] FT
for terrace applications



Plank Thickness 20 - 30 mm



Optional accessories: SIHGAFIX[®]
TX 20, 77 mm; p. 14 & TTB p. 129



SIHGA® Feature

YOUR Benefit

for untreated, profiled wooden planks released by SIHGA®	we recommend using TefaFix® T rail as substructure
manufactured, developed, and patented in Austria	highest European quality and value creation
screwed fastening for floorboards only in the joint with the SenoFix® FT, cover- and lateral surfaces of the boards remain unharmed	creating a visually appealing surface is quick, simple and precise
expansion mechanism with joint width of 7 mm in final state	no spacers needed for assembly
assembly possible without additional tools	no additional costs for clamps or belts, etc.
connector height per the latest state of the art	automatic spacing from substructure of 8 mm
stabilises and compensates for any swelling and shrinkage in the wood	increases the lifespan of the terrace considerably
only 1 screw per attachment point	requires 50 % less installation time and provides perfect grip
available with two different screw lengths	use on wood and alu substructure
produced of reinforced SIHGAMID	is therefore permanently heat-, frost- and UV-resistant
attachment screw made of hardened stainless steel	is permanent and break-proof
including SIHGAFIX® stainless steel, all attachment screws and installation instructions	time-saving, practical, precise, all accessories are included, SIHGAFIX® stainless steel prevents extraneous rust
quantity calculation per m²	1:substructure spacing [m]:[board width [m] + joint [m]]
HFA inspected in combination with thermo ash	for details please see page 66

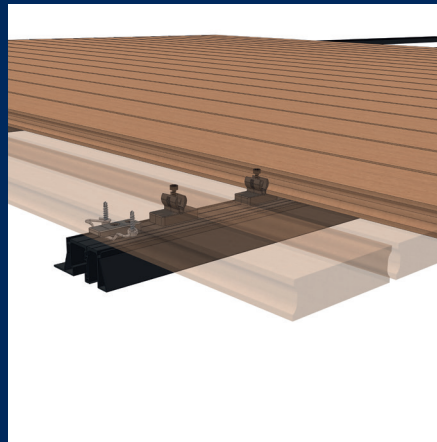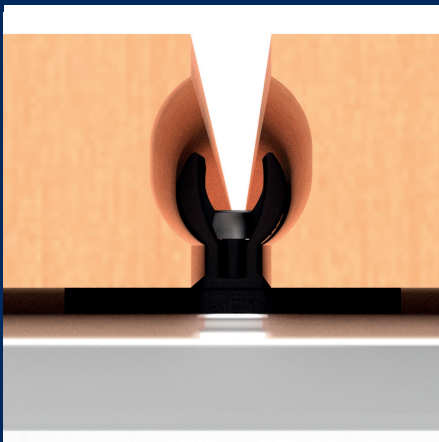

SIHGA® TIP:

Note design recommendations (page 64).
For oiled terraces we recommend the SenoFix® II SX.

