



Herakulix[®] M


TECHNICAL DATA SHEET



*optimal accessor MI RZ

SIHGA [®]	Herakulix [®]	Wood Connection	Adjustment Range		Design Value		Character. Values**	
			Height [mm]	from	to	Compressive Force [kN]	Shear Force [kN]	Tensile Force [kN]
objektpack [®]								
Art. No.	PU	Type	Type	from	to	R _{c,d}	R _{v,d}	R _{t,k}
51307	5	M RI 40	IdeFix [®] IFK 406	155	220	89,09	3,25	29,00
51317	5	M QI 40	IdeFix [®] IFK 406	155	220	89,09	3,25	29,00
51327	5	M RG	GoFix [®] S+ 8,0 x 125	155	220	89,09	-	10,90
51337	5	M QG	GoFix [®] S+ 8,0 x 125	155	220	89,09	-	10,90
51347	5	M BG	GoFix [®] S+ 8,0 x 125	137	202	89,09	3,20	10,90
47716	5	*MLRZ	Ring + Scheibe	M 27	Ø 50/28			

** characteristic values for design according to EC 5 and strength class C 24 (ρ_k 350 kg/m³)

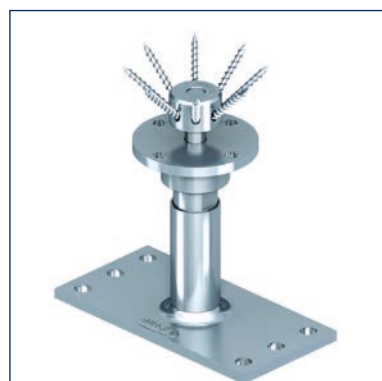

DETAILS

- integrated inclination compensation of up to ±5° in all directions
- two-part system with a short retraction path
- permissible for use in areas exposed to weather (Usage Class (NKL) 3)
- allows individual anchoring and unimpeded 90° drilling

ETA-18/0886

