

Pfalu®

TECHNICAL DATA SHEET



SIHGA®	Dimension	GoFix® S+ Post Attachmet	BeziFix® Anchor ZF Concrete Attachment	max. Moment
montagepack	Pfalu®	d1 x L	d1 x L	M _d
Art. No.	PU	Ø x h	[mm]	[kNm]
43526	5	90 x 46	8,0 x 195	7,5 x 60



* geprüfte Betongüte C 35/45 unbewehrt

SIHGA®	Dimension	GoFix® S+ Post Attachmet	GoFix® S+ Attachment to Wood incl. Support Reinforcement	max. Moment
montagepack	Pfalu® S+	d1 x L	d1 x L	M _d
Art. No.	PU	Ø x h	[mm]	[kNm]
43536	5	90 x 46	8,0 x 195	8,0 x 125

Example: 100 km/ h wind speed closed area max. 80 %

Fence Height	Field Width*
[m]	[m]
1,8	1,7
1,5	2,4
1,2	3,8
1,0	5,4

* these distances apply only to the specified boundary conditions in residential areas

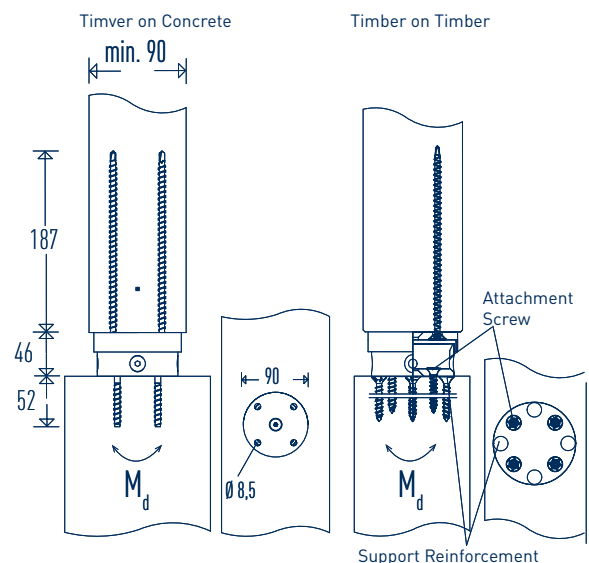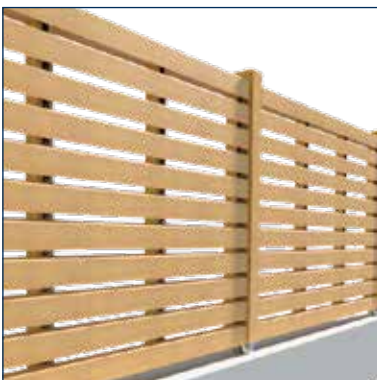

DETAILS

- fastenings for fence and railing posts
- stepless and easily accessible incline adjustment up to 4 degrees in all directions
- straight-lined, flush appearance of the posts without complex compensation panels, applicable to 15 cm concrete width



TAKE THE BEST



**KLIMANEUTRALES
UNTERNEHMEN**
certified by Fokus Zukunft



Leitbetrieb Österreich Leitbetrieb Deutschland