



GoFix[®] MS II (4,0/ 4,5/ 5,0)

TECHNICAL DATA SHEET

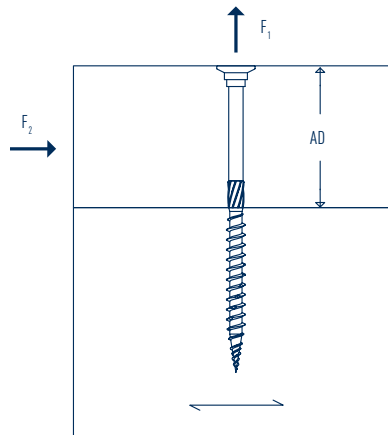

Dimension [mm]

GoFix [®] MS II				
d1	TX	DK	KS 1	KS 2
4,0	15	8,0	5,2	4,0
4,5	20	9,0	5,9	4,5
5,0	25	10,0	6,6	5,0

SIHGA [®] montagepack		Dimension GoFix [®] MS II	Installation Part AD	Characteristic Values*			
Art. No.	PU	d1 x L	[mm]	Tensile Force F _t [kN]		Shear Force F _s [kN]	
				Head	Thread	Wood-Wood	Steel-Wood
44056	500	4,0 x 30	12	1,04	1,04	0,75	1,10
44066	500	4,0 x 35	14	1,13	1,22	0,79	1,23
44076	500	4,0 x 40	16	1,13	1,39	0,82	1,29
44086	500	4,0 x 45	18	1,13	1,57	0,84	1,29
44096	500	4,0 x 50	20	1,13	1,74	0,87	1,29
44106	500	4,0 x 60	24	1,13	2,09	0,94	1,29
44226	400	4,5 x 50	20	1,39	1,89	1,01	1,52
44236	400	4,5 x 60	24	1,39	2,27	1,09	1,52
44246	300	4,5 x 70	28	1,39	2,65	1,16	1,52
44316	200	5,0 x 50	20	1,67	2,07	1,20	1,92
44326	200	5,0 x 60	24	1,67	2,48	1,27	1,92
44336	200	5,0 x 70	28	1,67	2,90	1,34	1,92
44346	200	5,0 x 80	32	1,67	3,31	1,42	1,92
44356	200	5,0 x 90	36	1,67	3,73	1,48	1,92
44366	200	5,0 x 100	40	1,67	4,14	1,48	1,92
44376	200	5,0 x 120	50	1,67	4,83	1,48	1,92

Subject to technical modifications and errors. Status of approval 12.2022

* characteristic values for measurement according to EC 5, bulk density $\rho_k = 350 \text{ kg/m}^3$ [C24]



DETAILS

- special thread geometry - optimal traction in the end grain
- fastens pressure-resistant insulation materials for on-rafter insulation (above 50 kPa)
- screwing permissible from 0° to 90° to the grain

ETA-20/0558




TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland

GoFix[®] MS II (6,0)

TECHNICAL DATA SHEET

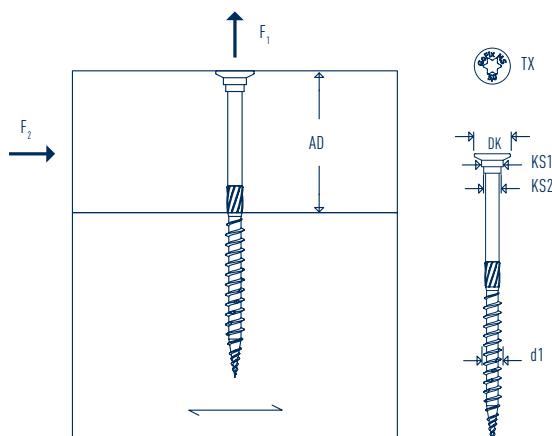

DETAILS

- special thread geometry - optimal traction in the end grain
- screwing permissible from 0° to 90° to the grain

ETA-20/0558





TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland

GoFix[®] MS II (8,0)

TECHNICAL DATA SHEET

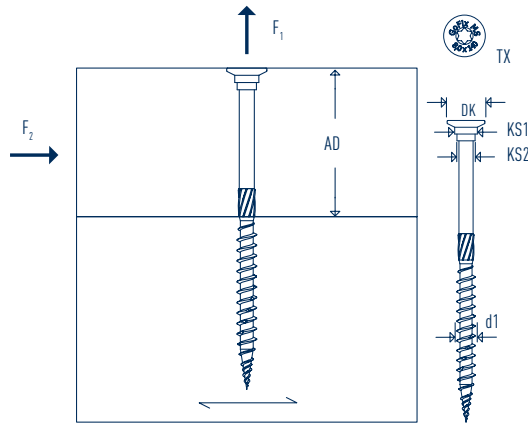

DETAILS

- special thread geometry - optimal traction in the end grain
- screwing permissible from 0° to 90° to the grain

ETA-20/0558





TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland

GoFix[®] MS II (10,0)

TECHNICAL DATA SHEET

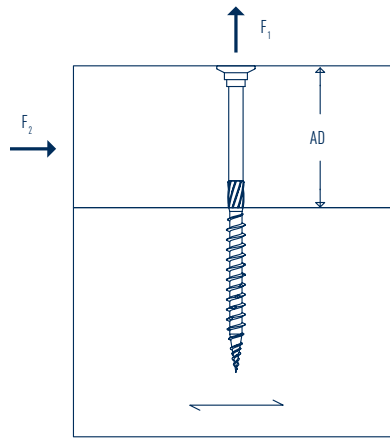

DETAILS

- special thread geometry - optimal traction in the end grain
- screwing permissible from 0° to 90° to the grain

ETA-20/0558



TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland