


GoFix® JK

TECHNISCHES DATENBLATT




SIHGA®		Dimension	Anbauteil	Setztiefe	Justierbereich	Empfohlene Lasten	
montagepack	GoFix® JK		AD	ST	bis	Zugkraft F_1 [kN]	
Art. Nr.	VE	d1 x L	[mm]	[mm]	[mm]	Kopf	Gewinde
29326	100	6,0 x 80	20	50	10	0,51	1,03
29336	100	6,0 x 100	20	50	30	0,51	1,03
29346	100	6,0 x 120	20	50	50	0,51	1,03
29356	100	6,0 x 145	20	50	75	0,51	1,03
29366	100	6,0 x 160	20	50	90	0,51	1,03

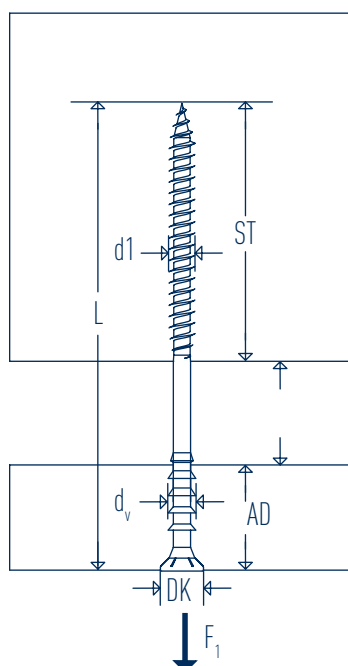

Abmessung [mm]

GoFix® JK

d1	dV	TX	DK
6,0	6,5	25	10,0

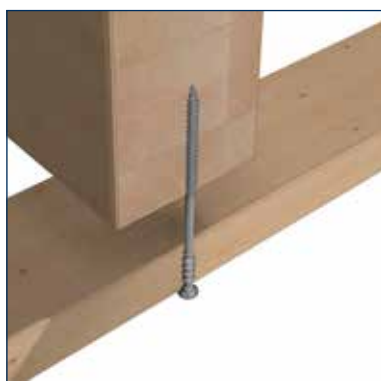

DETAILS

- für professionelle Montage von Holz auf Holz (inklusive Distanz der beiden Hölzer)
- Rippen ziehen sich ohne Vorbohren ins Holz (Justierung in horizontaler oder vertikaler Richtung möglich)



TAKE THE BEST



KLIMANEUTRALES
UNTERNEHMEN
certified by Fokus Zukunft



Leitbetrieb Österreich Leitbetrieb Deutschland