



GoFix® X+ 8,0




SIHGAFIX®

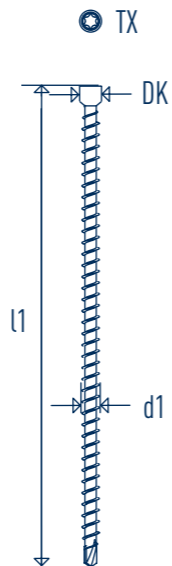

GoFix® X+ 8,0			
d1	l1	TX	DK
8,0	155	40	10
8,0	195	40	10
8,0	220	40	10
8,0	245	40	10
8,0	270	40	10
8,0	295	40	10
8,0	330	40	10
8,0	375	40	10
8,0	400	40	10
8,0	430	40	10
8,0	480	40	10


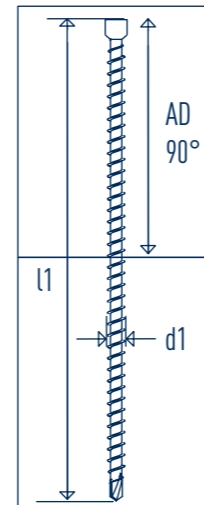


GoFix® X+ 8,0		
d1	l1	AD 90
8,0	155	80
8,0	195	100
8,0	220	110
8,0	245	125
8,0	270	135
8,0	295	150
8,0	330	170
8,0	375	190
8,0	400	200
8,0	430	215
8,0	480	240

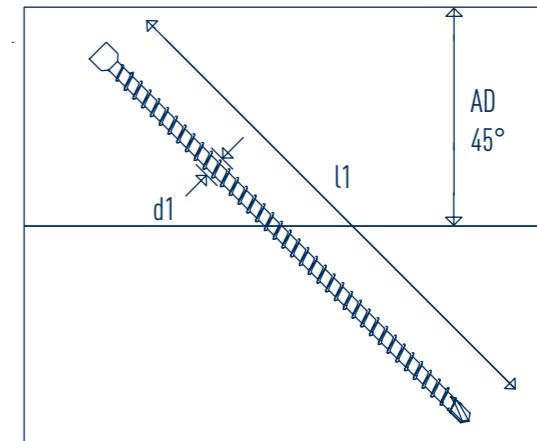

GoFix® X+ 8,0		
d1	l1	AD 45
8,0	155	60
8,0	195	70
8,0	220	80
8,0	245	90
8,0	270	95
8,0	295	105
8,0	330	120
8,0	375	135
8,0	400	145
8,0	430	155
8,0	480	170

MA Nr. 38313/26/2

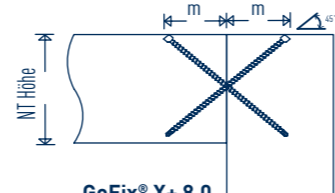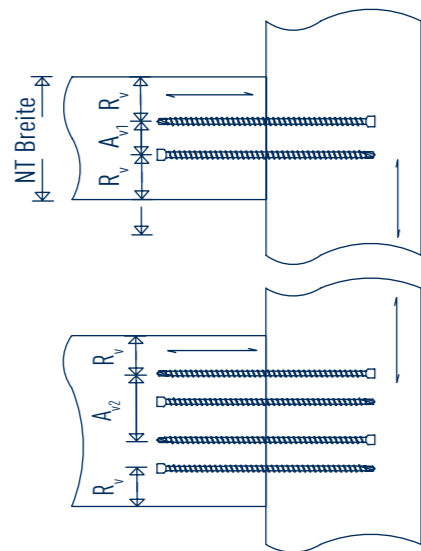

GoFix® X+ 8,0							
d1	l1	NT B	NT H	m	Rv	Av1	Av2
8,0	220	64	160	80	24	12	40
8,0	245	64	180	90	24	12	40
8,0	270	64	200	100	24	12	40
8,0	295	64	220	110	24	12	40
8,0	330	64	240	120	24	12	40
8,0	375	64	270	135	24	12	40
8,0	400	64	290	145	24	12	40
8,0	430	64	310	155	24	12	40
8,0	480	64	350	170	24	12	40





www.sihga.com

GoFix® X+ Setzlehre SL2



(B)

GoFix® X+ Balkenhalter BH2




GoFix® X+ Montagewinkel MW3/MW4




www.sihga.com

GoFix® SK 6,0





(E)

Duo Bit TX 40 - 200 mm



A1

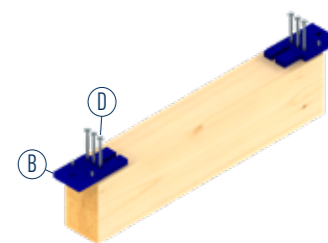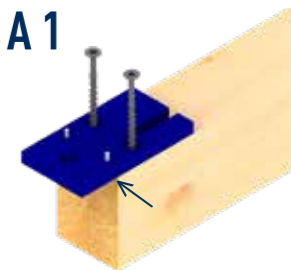

(D)

(B)

GoFix® X+ 8,0

INNOVATIVE BAUTECHNOLOGIE MIT SUPPORT FÜR DIE ZUKUNFT

TAKE THE BEST



