


GoFix[®] X+



TECHNICAL DATA SHEET

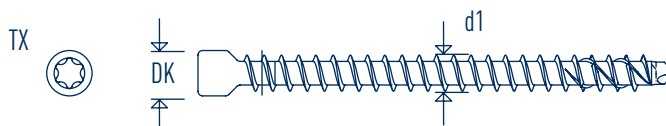

Dimension [mm]

GoFix[®] X+

d1	TX	DK
6,5	30	8,0
8,0	40	10,0
10,0	50	13,0

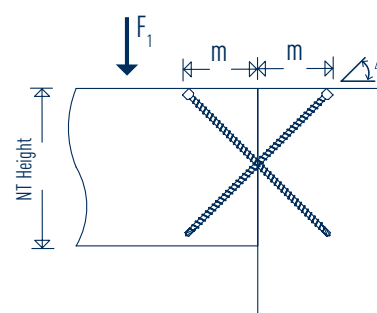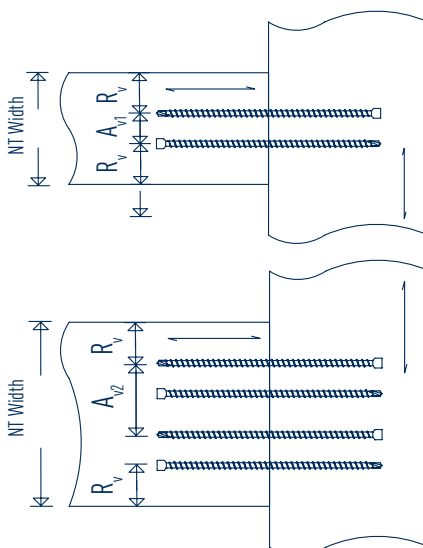

Dimension [mm]

GoFix[®] X+

d1	TX	DK	R _v	A _{v1}	A _{v2}
6,5	30	8,0	20	10	33
8,0	40	10,0	24	12	40
10,0	50	13,0	30	15	50



DETAILS

- fastens blunt wood connections extremely quickly
- made from hardened carbon steel
- screwing permissible from 0° up to 90° to the grain
- pre-drilling also permitted, for GoFix[®] X+ Ø 6.5 mm with 4 mm, with Ø 8.0 mm with 5 mm, with Ø 10.0 mm with 6 mm

ETA-11/0425






TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland

GoFix[®] X+

TECHNICAL DATA SHEET

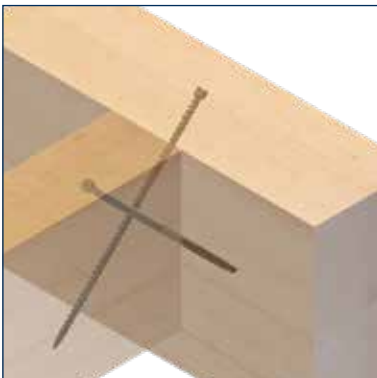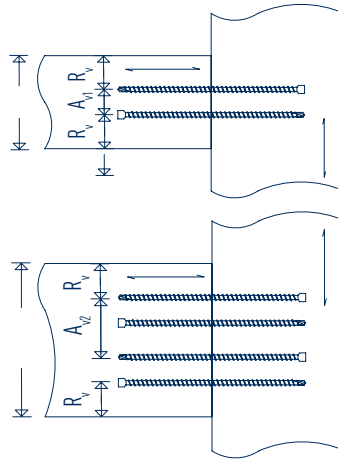

DETAILS

- fastens blunt wood connections extremely quickly
- made from hardened carbon steel
- screwing permissible from 0° to 90° to the grain
- pre-drilling also permitted, for GoFix[®] X+ Ø 6.5 mm with 4 mm, with Ø 8.0 mm with 5 mm, with Ø 10.0 mm with 6 mm

ETA-11/0425




TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland

GoFix[®] X+

TECHNICAL DATA SHEET

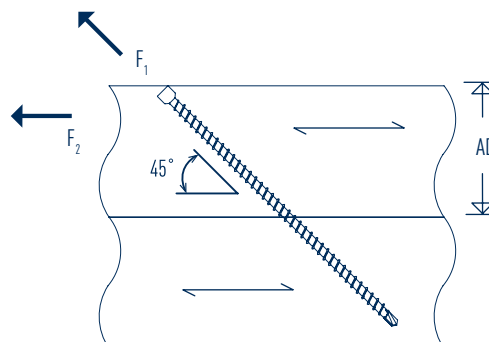

DETAILS

- fastens blunt wood connections extremely quickly
- made from hardened carbon steel
- screwing permissible from 0° to 90° to the grain
- pre-drilling also permitted, for GoFix[®] X+ Ø 6.5 mm with 4 mm, with Ø 8.0 mm with 5 mm, with Ø 10.0 mm with 6 mm

ETA-11/0425




TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland

GoFix[®] X+

TECHNICAL DATA SHEET

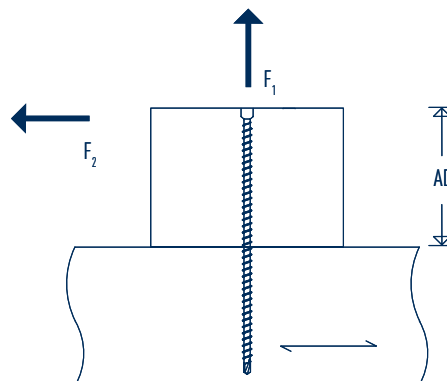

DETAILS

- fastens blunt wood connections extremely quickly
- made from hardened carbon steel
- screwing permissible from 0° to 90° to the grain
- pre-drilling also permitted, for GoFix[®] X+ Ø 6.5 mm with 4 mm,
- with Ø 8.0 mm with 5 mm, with Ø 10.0 mm with 6 mm

ETA-11/0425




TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland

GoFix[®] X+

TECHNICAL DATA SHEET

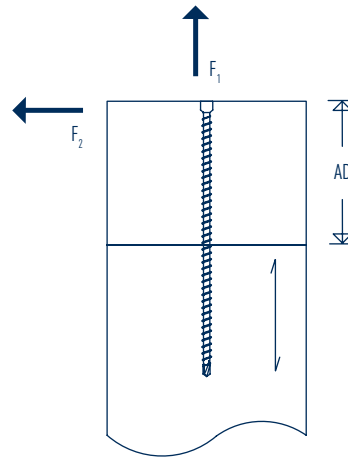

DETAILS

- fastens blunt wood connections extremely quickly
- made from hardened carbon steel
- screwing permissible from 0° to 90° to the grain
- pre-drilling also permitted, for GoFix[®] X+ Ø 6.5 mm with 4 mm, with Ø 8.0 mm with 5 mm, with Ø 10.0 mm with 6 mm

ETA-11/0425



TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland