


BeziFix[®] SR II

TECHNICAL DATA SHEET

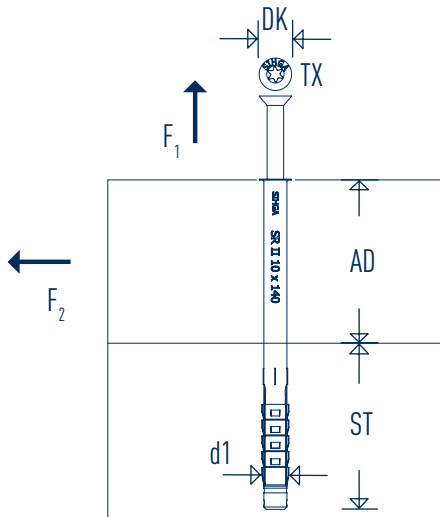

SIHGA [®] montagepack Hozibo [®]	SIHGA [®] montagepack Stabebo		Dimension BeziFix [®] SR II	Installation Part AD
Art. No.	Art. No.	PU	d1 x L	[mm]
32016	32516	50	10 x 80	20
32026	32526	50	10 x 100	40
32036	32536	50	10 x 120	60
32046	32546	50	10 x 140	80
32056	32556	50	10 x 160	100
32066	32566	50	10 x 180	120
32076	32576	50	10 x 200	140
32086	32586	50	10 x 230	170
32096	32596	50	10 x 260	200

Min. setting depth of 60 mm in load-bearing wall
HLZ = hollow brick

Dimension BeziFix [®] SR II	Installation Part AD	Characteristic Values	
d1 x L	[mm]	Tension F ₁ / Transverse F ₂ HLZ [kN]	Tension F ₁ / Transverse F ₂ Beton [kN]
10 x 80	20	0,90	3,00
10 x 100	40	0,90	3,00
10 x 120	60	0,90	3,00
10 x 140	80	0,90	3,00
10 x 160	100	0,90	3,00
10 x 180	120	0,90	3,00
10 x 200	140	0,90	3,00
10 x 230	170	0,90	3,00
10 x 260	200	0,90	3,00

Dimension [mm]

BeziFix [®] SR II			
d1	TX	DK	ST
10	40	14	60



DETAILS

- works in vertical coring bricks, light, normal and cellular concrete, solid brick, and solid sand-lime bricks
- integrated anti-rotation lock
- fastens 20 - 200 mm thick materials
- can be screwed flush-mounted

ETA-15/0832



TAKE THE BEST



Leitbetrieb Österreich Leitbetrieb Deutschland