


BeziFix[®] SR II

SIHGA[®]



ETA-15/0832

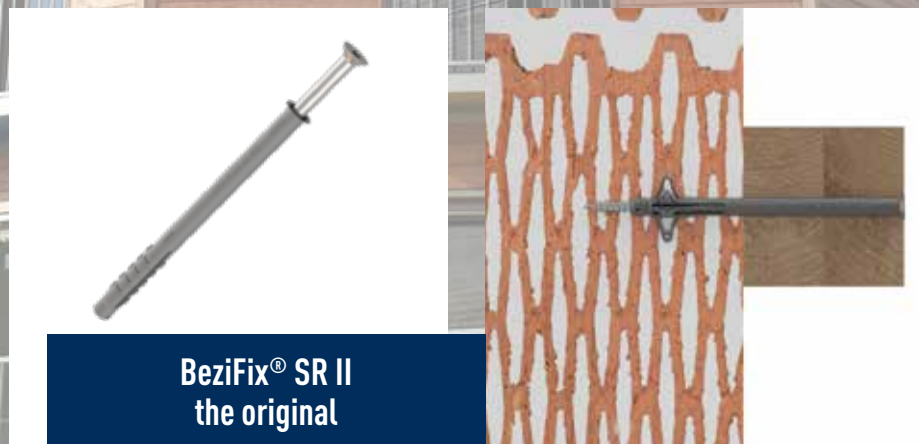

SIHGA® Feature

works in vertical coring bricks, light, normal and cellular concrete, solid brick, and solid sand-lime bricks

integrated anti-rotation lock

fastens 20 - 200 mm thick materials

designed with extra thin waistband

screw packaged already inserted into anchor

includes SIHGAFIX®, Hozibo® or Stabebo SDS drill and installation instructions

design values

YOUR Benefit

particularly good bearing capacity, even in hollow brick

for easy installation

universally usable with low storage costs

can be screwed flush-mounted


fast, saves installation work on-site

time-saving, practical, precise, complete accessories included; Hozibo® when drilling in brick or Stabebo SDS, the concrete drill

SIHGA® performs the calculation for you

SIHGA® montagepack Hozibo®	SIHGA® montagepack Stabebo		Dimension BeziFix® SR II	Installation Part AD	Characteristic Values	
Art. No.	Art. No.	PU	d1 x L	[mm]	Tension F_1 / Transverse F_2	Tension F_1 / Transverse F_2
					HLZ [kN]	Beton [kN]
32016	32516	50	10 x 80	20	0,90	3,00
32026	32526	50	10 x 100	40	0,90	3,00
32036	32536	50	10 x 120	60	0,90	3,00
32046	32546	50	10 x 140	80	0,90	3,00
32056	32556	50	10 x 160	100	0,90	3,00
32066	32566	50	10 x 180	120	0,90	3,00
32076	32576	50	10 x 200	140	0,90	3,00
32086	32586	50	10 x 230	170	0,90	3,00
32096	32596	50	10 x 260	200	0,90	3,00

Min. setting depth of 60 mm in load-bearing wall
HLZ = hollow brick

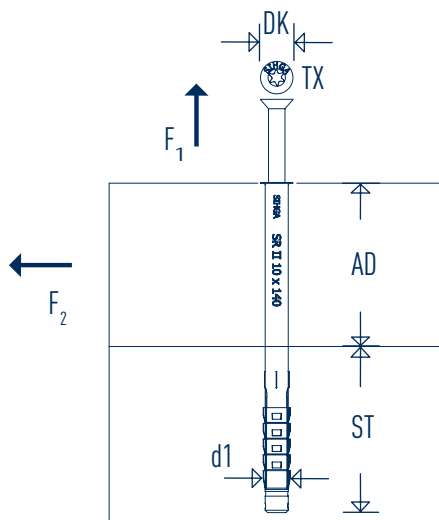

Dimension [mm]

BeziFix® SR II			
d1	TX	DK	ST
10	40	14	60