




# GoFix® XB 8,0

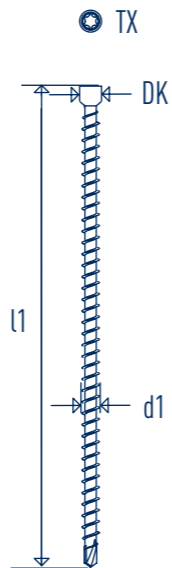

GoFix® XB 8,0			
d1	l1	TX	DK
8,0	155	40	10
8,0	195	40	10
8,0	220	40	10
8,0	245	40	10
8,0	295	40	10
8,0	330	40	10
8,0	375	40	10
8,0	400	40	10

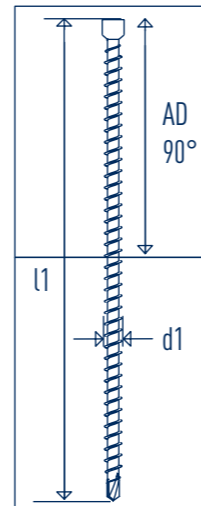

GoFix® XB 8,0		
d1	l1	AD 90
8,0	155	80
8,0	195	100
8,0	220	110
8,0	245	125
8,0	295	150
8,0	330	170
8,0	375	190
8,0	400	200

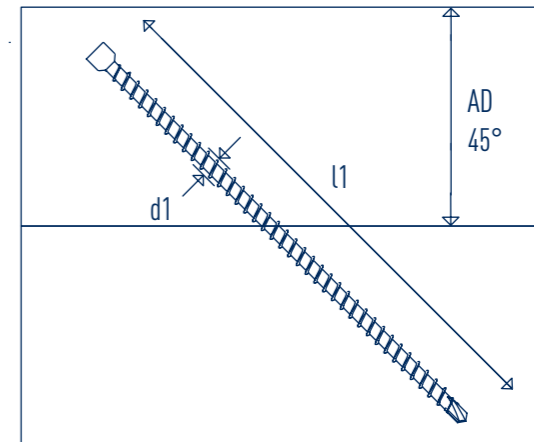



GoFix® XB 8,0		
d1	l1	AD 45
8,0	155	60
8,0	195	70
8,0	220	80
8,0	245	90
8,0	295	105
8,0	330	120
8,0	375	135
8,0	400	145

## GoFix® XB 8,0



Mehr Information zum Produkt!

MA Nr. 38641/16/1

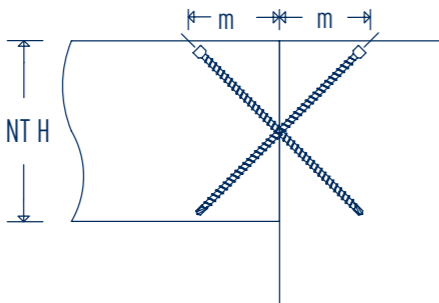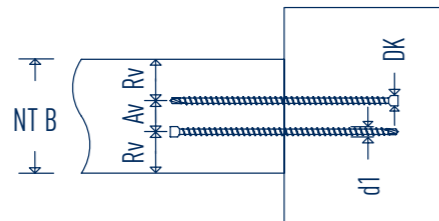

GoFix® XB 8,0						
d1	l1	NT B	NT H	m	Rv	Av
8,0	195	70	140	70	24	20
8,0	220	70	160	80	24	20
8,0	245	70	180	90	24	20
8,0	295	70	220	110	24	20
8,0	330	70	240	120	24	20
8,0	375	70	270	135	24	20
8,0	400	70	290	145	24	20




www.sihga.com

GoFix® XB Setzlehre SL2




(A)



(C)

GoFix® XB Balkenhalter BH2



(B)

GoFix® XB Montagewinkel MW3/MW4




www.sihga.com

GoFix® SK 6,0





(D)

Duo Bit TX 40 - 200 mm



(E)

A1

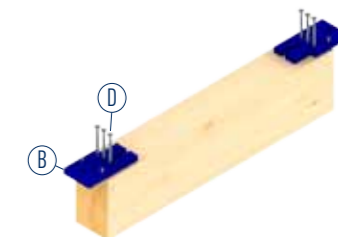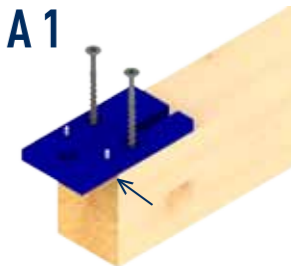

(B)

(D)

TAKE THE BEST



