


# Winkelix<sup>®</sup> X+

SIHGA<sup>®</sup>

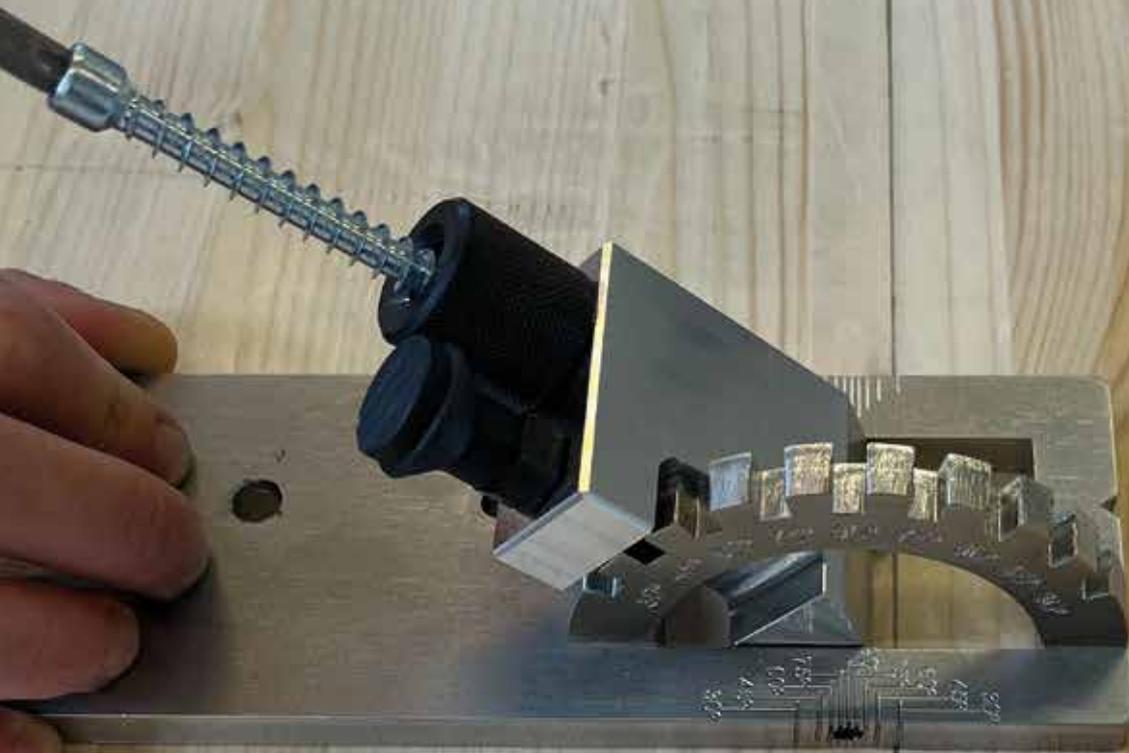

Winkelix<sup>®</sup> X+

## SIHGA® Feature

Variable drill and screw template for GoFix® X+

Adjustable from 30° - 90° in 15° increments, also in a mirrored arrangement

Suitable for different screw diameters

Can also be used as a drilling template

Adapter pipes made of hardened tool steel

Winkelix® X+ base body made of high-quality stainless steel

developed and manufactured in Austria

## YOUR Benefit

One template for all common angles, including adapter tube for GoFix® X+ Ø 8.0 mm

Suitable for almost any application in timber construction for drilling and screwdriving



The GoFix® X+ can be used with screw diameters of 6.5 mm, 8.0 mm and 10 mm, and the GoFix® ZS 8.0 mm can be processed with the different adapter tubes

The adapter tube Ø 6.0 mm can be used to pre-drill the holes for the screw connections at the factory

promises a high level of wear resistance

for a long service life and elegant appearance

highest European quality and added value

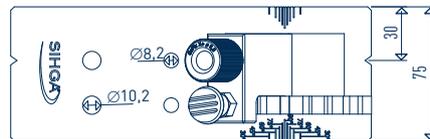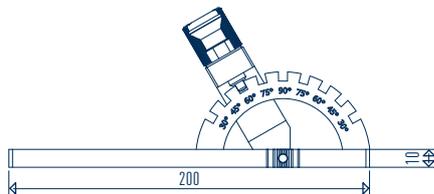

SIHGA® montagepack Winkelix® X+ incl. adapter tube		
Art. No.	PU	Type
42746	1	8,0

SIHGA® montagepack		Dimension		Application	
Art. No.	PU	Winkelix® X+ adapter tube Type	Ø hole [mm]	for drill diameter [mm]	for GoFix® X+/ZS [mm]
42782	1	6,0	6,2	6	-
42772	1	6,5	8,4	8	6,5
42762	1	8,0	10,6	10	8,0
42752	1	10,0	13,6	13	10,0



### SIHGA® TIP:

The 150 mm long DUO-Bit TX 30, 40 or 50 is required as an accessory.