


FassadenClip® FCS

TECHNISCHES DATENBLATT



SIHGA® montagepack		Dimension FassadenClip® FCS	Dimension Fassadenprofil		
Art. Nr.	VE	Type	Höhe [mm]		Dicke [mm]
			min.	max.	min.
32355	300	115 x 17	57	68	19
32365	300	115 x 22	57	68	24
32375	300	115 x 28	57	68	30
32385	300	130 x 17	69	80	19
32395	300	130 x 22	69	80	24
32405	300	130 x 28	69	80	30
32415	300	145 x 17	81	95	19
32425	300	145 x 22	81	95	24
32435	300	145 x 28	81	95 <td 30	

L-BohrFix® FB
Ø 4,5 x 29




BohrFix® FB
Ø 4,2 x 17 / 22 / 28



Abmessung [mm]

FassadenClip® FCS

L	B	H
115	15	5,5
130	15	5,5
145	15	5,5

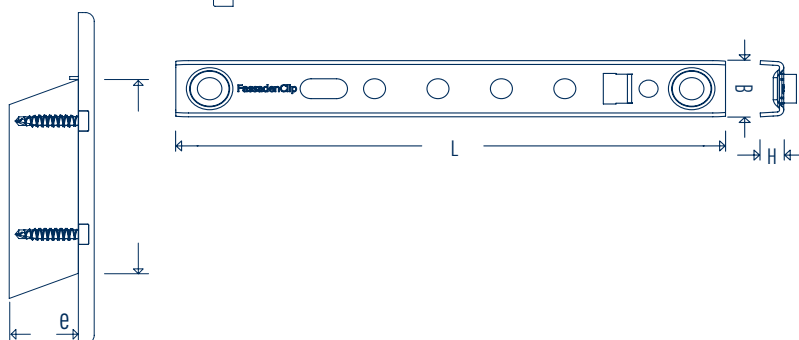

DETAILS

- für alle Holzarten mit Profilhöhe 57 - 95 mm geeignet
- automatische Distanz zur Unterkonstruktion 5,5 mm
- frei wählbare Sichtfugenbreite, wir empfehlen 10 mm

Mengenermittlung pro m² :

1 : Abstand Unterkonstruktion [m] : (Höhe Fassadenprofil [m] + Fuge [m])

